



Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

EL167

Expandable, Ultra Bright™ Line Light

- 4i** 345,000 Lux; 45% brighter than the EL137
- 4i** Passively cooled design in 6" increments; Available in lengths from 6" to 96"
- 4i** Intensity control of entire light via 10 - 0v input



Ordering Information

Standard Product Variation:
Shipped Within Three Weeks

EL167	Lens Type	Lighted Length	Spectral wavelength	Optional power compatibility
	X	XX	XXX	XX
	D	6"	(blue) 470	C3 Δ
	E	increments	(green) 530	24
	F	up to 96"***	(red) 625	IC *
	G		(white) WHI	

Δ 42" maximum length
* Allows for control of intensity on each 6" section
** Lights over 42" in length have dual cables


Lens	Working Distance	Beam Width
D	50mm (2")	2mm (.08")
E	75mm (3")	3mm (.13")
F	150mm (6")	6mm (.25")
G	300mm (12") 600mm (24") 900mm (36") 1200mm (48")	25mm (1.0") 45mm (1.7") 64mm (2.5") 75mm (3.0")

Built-to-order lights are non-returnable.

Dimensional Information

TABULATION TABLE		
DASH NUMBER	LENGTH (XX)	DESCRIPTION
-03	3.0"	EL137x03
-06	6.0"	EL137x06
LL137*	12.0"	---
-18	18.0"	EL137x18
-24	24.0"	EL137x24
-30	30.0"	EL137x30
6" increments up to a max. 96"		
-96	96.0"	EL137x96

* see LL137 spec sheet
x = lens option (D, E, F, G)

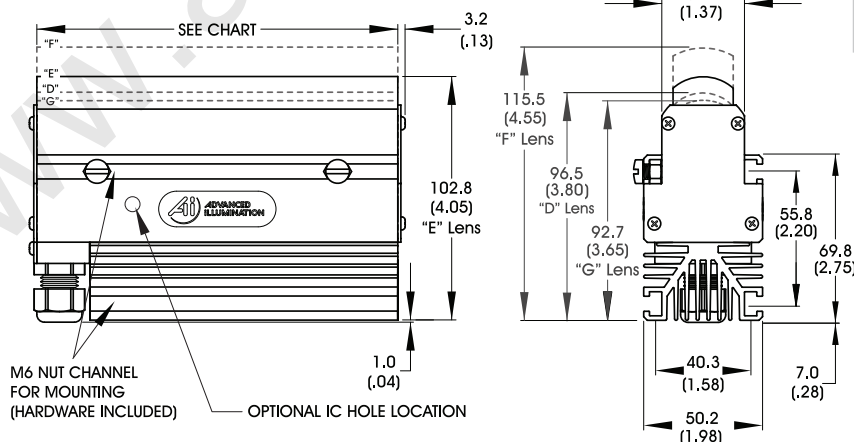

Click for Installation Models & Drawings

Cable Length: 1.5 Meter (59")

Standard Variation Current Specifications
Maximum draw per 152mm (6") length

	blue	green	red	white
@24	1.1A	1.1A	1.1A	1.1A

Standard Product Information

Finish: Black Anodized
Operating Temperature: 0-60° C
Meets Specifications: CE, RoHS

LED products provide a lifespan significantly greater than other visible lighting technologies

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com