

FUJIFILM
expect INNOVATION™

ZA SELECT



ZA22x7.6BE RM/RD

Technology That Inspires...

FUJINON

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

ZA22x7.6BE RM/RD*




LENS	ZA22x7.6BE RM/RD*
Zoom Ratio / Format	22X / 2/3"
Focal Length	7.6 to 167 mm
Extender	(2X) 15.2 to 334 mm
Maximum Relative Aperture	1:1.8 (7.6 ~ 120 mm)
Aperture	1:2.5 (167 mm)
Maximum Photometric Aperture T-No.	1:1.9 (7.6 ~ 120 mm)
Aperture T-No.	1:2.6 (167 mm)
Angular Field of View	7.6 mm64° 30' x 39° 03'
16:9 Aspect Ratio	167 mm3° 08' x 1° 46'
	(2X)15.2 mm35° 01' x 20° 07'
	334 mm1° 34' x 0° 53'
M.O.D. from Image Plane	1.07 m
M.O.D. from Front of Lens	0.8 m
Object Dimensions at M.O.D.	7.6 mm 909 x 511 mm
	167 mm 43 x 24 mm
	(2X) 15.2 mm 455 x 256 mm
	334 mm 22 x 12 mm
Filter Size	ø 95 mm P=1 (On Barrel)
	ø 107 mm P=1 (In Hood)
Dia ø x Length (w/o Hood)	ø100 x 222.6 mm
Weight (w/o Hood)	1.75 kg (RM) / 1.82 kg (RD)*
Options	16 Bit Encoder
Features	Inner Focus / Zoom Limit Quick Zoom

*RD contain servos for zoom and focus.

ACCESSORIES: HD & SD ENG/EFP


THREE-MODE FINE FOCUS

By shifting the sensitivity from the wide side to the telephoto side of the focus range, this control provides more precise focusing for studio or sports productions.




SERIAL DIGITAL REMOTE CONTROL BY PC

Remote control of zoom, focus and iris for Digipower lenses is possible via serial digital link, providing accurate positioning for virtual studio and other applications requiring digital precision.




DIGI ZOOM DEMAND*

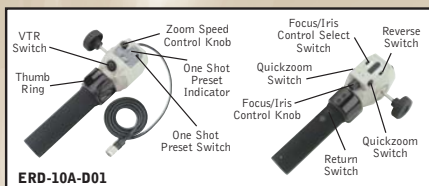

*New Digital features only available on ERM/ERD-M/S.

- A. CFC-990 Flex Cable
- B. FMM-3B/6B Manual Module
- C. ZMM-6 Manual Module
- D. EBF-1 Focus Cable
- E. MCA-6
- F. ERD-20A-A02 Zoom Demand
- G. FSP-13G Focus Positional Module
- H. EPD-4A-E02
- I. C2H-14 Focus Handle
- J. CFH-11 Focus Handle
- K. MCA-7 Mounting Clamp
- L. EPD-20A-A01/A02 Focus Demand
- M. ERD-10A-D01 Zoom Demand
- N. ALH-117A-02A Support for HA36x/A36x/HA42x

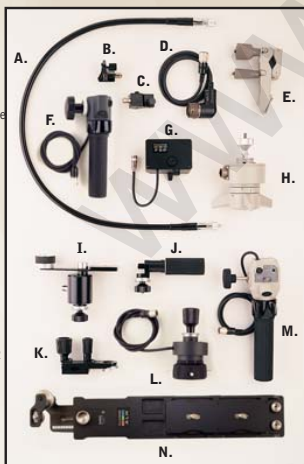


Note: ERD-20A-A02 (F) and EPD-20A-A02 (L) replace the ERD-T22 and EPD-2CA.

DIGI POWER REAR CONTROL KITS


MS-11D Manual Focus/Servo Zoom

For use with RM/ZM type lenses.




SS-11D Servo Focus/Servo Zoom

For use with RM/ZM type lenses.




SS-13D Servo Focus/Servo Zoom

For use with RD/ZD type lenses.




SS-14S Servo Focus/Servo Zoom

For use with RD/ZD type lenses.




STANDARD REAR CONTROL KITS

MS-11 Manual Focus/Servo Zoom




SS-11 Servo Focus/Servo Zoom

Not available on HA42x, HA36x and A36.




SS-13A Servo Focus/Servo Zoom

For use with ERD type lenses.



MM-11 Manual Focus/Manual Zoom

Not available on HA42x, HA36x and A36.



*Specify camera type

**FMM-3C for use on HA36x, HA42x and HA25x

MOUNTING SYSTEM

Fujinon has replaced the "cone" shaped mounting system with the "tooth" system. The cone type may still be ordered as a special order.



ACCESSORIES: HD ENG/EFP

LENS CONVERTERS



Wide Converter (WCV)




Tele Converter (TCV)

HD/ENG LENS CONVERTERS

Model	Type	ø Size	Converter* Mag.	Converted Focal Length (mm)	M.O.D. (m)	Weight (kg)
HS16x4.6	TELE	95 mm	TCV-H95	1.5x	74.0~111.0	0.90 1.0
	WIDE	95 mm	WCV-H95	0.8x	4.6~3.9	0.29 1.0
HS18x5.5/HS18x5.5	TELE	85 mm	TCV-H85	1.5x	100.0~150.0	1.35 1.1
	WIDE	85 mm	WCV-H85	0.8x	5.5~4.4	0.38 1.0
	WIDE	85 mm	WAT-H85	0.7x	5.5~3.9	0.29 0.3
	FISHEYE	85 mm	F-ATH85	0.57x	5.5~3.1	0.19 0.3
HA16x6.3	TELE	95 mm	TCV-H95	1.5x	101.0~152.0	0.90 1.0
	WIDE	95 mm	WCV-H95	0.8x	6.3~5.4	0.29 1.0
HA18x7.6E/HA18x7.6	TELE	85 mm	TCV-H85	1.5x	137.0~205.5	1.35 1.1
	WIDE	85 mm	WCV-H85	0.8x	7.6~6.1	0.38 1.0
	WIDE	85 mm	WAT-H85	0.7x	7.6~5.3	0.29 0.3
	FISHEYE	85 mm	F-ATH85	0.57x	7.6~4.3	0.26 0.6
HA22x7.3E	TELE	110 mm	TCV-H110	1.5x	161.0~242.0	1.90 1.1
HA23x7.6E	TELE	100 mm	TCV-H100	1.5x	175.0~262.5	1.80 1.0
	WIDE	100 mm	WCV-H100	0.8x	7.6~6.1	0.51 1.0
	WIDE	100 mm	WAT-H100	0.7x	7.6~5.3	0.39 0.5
	FISHEYE	100 mm	F-ATH100	0.57x	7.6~4.3	0.26 0.6
XS17x5.5	TELE	85 mm	TCV-H85	1.5x	94.0~141.0	1.35 1.1
	WIDE	85 mm	WCV-H85	0.8x	5.5~4.4	0.38 1.0
	WIDE	85 mm	WAT-H85	0.7x	5.5~3.8	0.29 0.3
	FISHEYE	85 mm	F-ATH85	0.57x	5.5~3.1	0.19 0.3
ZA17x7.6	TELE	85 mm	TCV-H85	1.5x	130.0~195.0	1.35 1.1
	WIDE	85 mm	WCV-H85	0.8x	7.6~6.1	0.38 1.0
	WIDE	85 mm	WAT-H85	0.7x	7.6~5.3	0.29 0.3
	FISHEYE	85 mm	F-ATH85	0.57x	7.6~4.3	0.19 0.3
ZA22x7.6	TELE	100 mm	TCV-H100	1.5x	167.0~250.5	1.80 1.0
	WIDE	100 mm	WCV-H100	0.8x	7.6~6.1	0.51 1.0
	WIDE	100 mm	WAT-H100	0.7x	7.6~5.3	0.39 0.5
	FISHEYE	100 mm	F-ATH100	0.57x	7.6~4.3	0.26 0.6

*TCV/WCV are zoom thru type **ø 95mm P-1 screw on type
Wide attachment and fisheye attachment can be used at WIDE END.
Number of M.O.D. is at wide end.

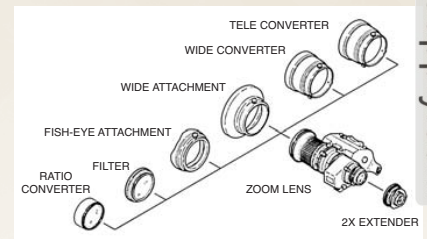

For Sales Contact Information go to
www.Fujinon.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101